



# SmartVent

the expert's choice



POSITIVE PRESSURE SYSTEMS  
HEAT & ENERGY RECOVERY SYSTEMS

# PRODUCT GUIDE

# Why SmartVent?

SmartVent is proudly owned by Simx, a business unit of the Volution Group. As a leading international designer and manufacturer of energy-efficient, indoor air quality solutions, Volution Group is committed to providing healthy air, sustainably.

An effective home ventilation system may well be just a low-cost product that keeps moisture build-up at bay. An efficient system, however, is an investment that delivers the quality of life we now expect as the minimum for in-home comfort. SmartVent offers a wide range of home ventilation solutions with systems designed to best suit the specific needs of any home today.

### Over 40 years experience in the ventilation market

Simx, the distributors of SmartVent home ventilation systems, have been in operation for over 40 years in the ventilation industry.

### SmartVent is the expert's choice

We are the choice of the professional trade market with most electricians recommending SmartVent.

### Acoustic duct for quieter performance

Our unique acoustic insulated duct reduces air noise travelling down the duct and entering rooms the outlets are placed in.

### State of the art controllers

SmartVent touchscreen controllers are designed in NZ, are fully automated and easy to use.

### Complete flexibility

A SmartVent system provides the complete solution for any situation. We provide the best value upgrades on the market. In many cases, our customers purchase the standard system initially and add upgrades at a later stage, which seamlessly operate off their existing controller.

### 5-year warranty

Simx sources only the highest quality componentry and as such, all SmartVent systems are supported by a 5-year warranty.



**SmartVent Home Ventilation Systems are recommended and installed by qualified electrical and HVAC contractors across the country.**

*Market feedback from these groups and consumers, along with ongoing investment in research and development has led to SmartVent having an incredibly flexible, future-proofed home ventilation systems in the New Zealand market.*




# Contents

Why SmartVent	2
Why Ventilate	4
What are we made of?	5
Positive Pressure Systems	6
Heat & Energy Recovery Systems	7
System Selection Guide	8
Traditional Ventilation vs Heat Recovery	9
System Comparison Table	10-11
System Comfort Add-ons	12
Systems:	
<b>Lite+</b>	<b>13</b>
<b>Positive3</b>	<b>14</b>
<b>Positive Advance</b>	<b>15</b>
<b>Synergy3</b>	<b>16</b>
<b>Balance</b>	<b>17</b>
<b>Tempra</b>	<b>18</b>
<b>Fresh</b>	<b>19</b>
<b>PureAir Room 260X</b>	<b>20</b>
<b>Econiq</b>	<b>21</b>
Specifications – Positive Pressure	22
Specifications – Heat & Energy Recovery	23



## POSITIVE PRESSURE SYSTEMS

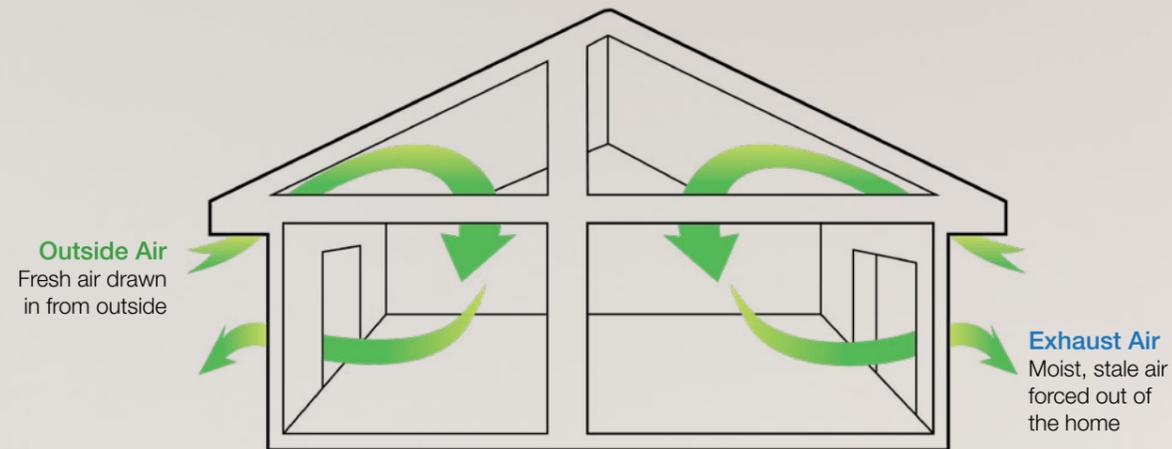


Positive Pressure Systems are ideal for managing moisture and humidity within your home. These systems draw in fresh air from the roof cavity and filter it before distributing the clean air around your home via a network of ceiling diffusers. The air movement forces the moist, stale air that causes condensation, mould and mildew out.

In winter especially, good air circulation and home heating are essential for maintaining indoor air quality. A home ventilation system from SmartVent reduces the excess damp, moisture-filled air and improves the overall air quality inside your home, making it much healthier for you and your family. A good investment for the well-being of your family and the overall health of your home.



## HEAT & ENERGY RECOVERY SYSTEMS

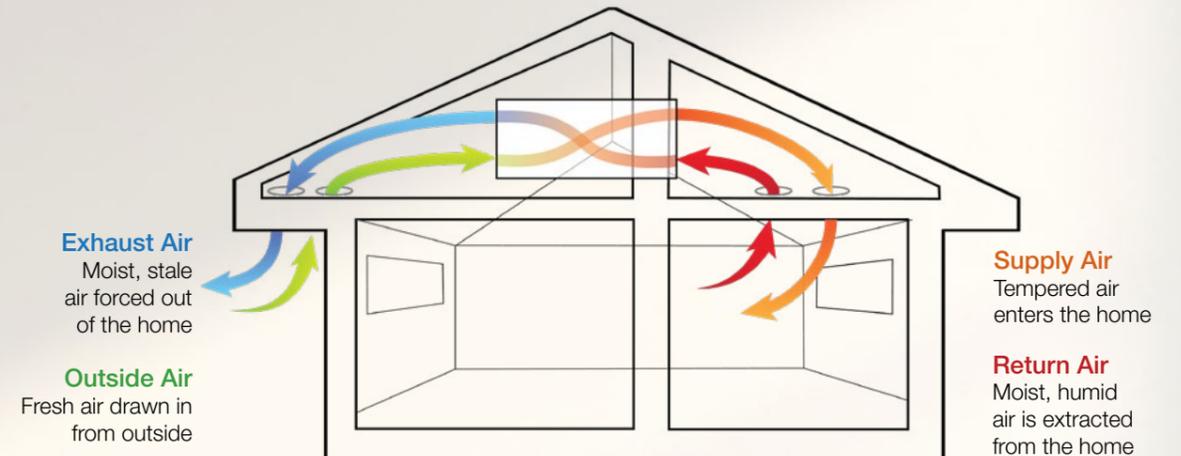

A Heat Recovery System is designed to bring fresh air into your home at a comfortable temperature. These systems recover heat or cooling energy from extracted room air as the heat recovery core transfers the heat from the outgoing air to the incoming air, warming or cooling your home respectively.

In winter, it is much more important that ventilation systems not only perform their basic function of extracting moist, stale air, but do so in a way that complements the costly efforts made to warm your home. System performance is best measured by the efficiency of the core. SmartVent has a wide range of Heat & Energy Recovery Systems, from highly efficient centralised systems designed for roof cavities, to decentralized through wall systems for either single rooms or an entire building.



# System Selection Guide

All SmartVent Home Ventilation Systems will help provide a drier, healthier home, but there's more to it than that. Find the best solution for you:

Do you have a roof space?



Is comfort and noise a priority to you?



Do you want to save / recover energy?



Do you want to recover heat from your bathroom?



Do you want the best controls?



SmartVent balance

SmartVent synergy3

SmartVent positive advance

SmartVent positive3

SmartVent temptra

SmartVent lite+

## Traditional Ventilation vs

# Heat Recovery




### Why Heat Recovery?

A heat recovery system can do more for you than just increasing your comfort while ventilating your home. When compared to a traditional ventilation system, it will make it more efficient to heat or cool your home, **lowering your power bill** throughout the year.


The following charts and graphs demonstrate how much of your heating bill you could save by installing a heat recovery system instead of a traditional ventilation system.

### Cumulative Heating Cost Savings

North Island	2 Years	5 Years	10 Years
Auckland	\$ 1,268.28	\$ 3,170.69	\$ 6,341.38
Hamilton	\$ 1,348.54	\$ 3,371.34	\$ 6,742.68
Tauranga	\$ 1,348.54	\$ 3,371.34	\$ 6,742.68
Taupo	\$ 2,224.97	\$ 5,562.44	\$ 11,124.87
New Plymouth	\$ 1,750.61	\$ 4,376.53	\$ 8,753.06
Hawke's Bay	\$ 1,724.04	\$ 4,310.10	\$ 8,620.20
Palmerston North	\$ 1,952.94	\$ 4,882.35	\$ 9,764.69
Wellington	\$ 1,665.66	\$ 4,164.16	\$ 8,328.32

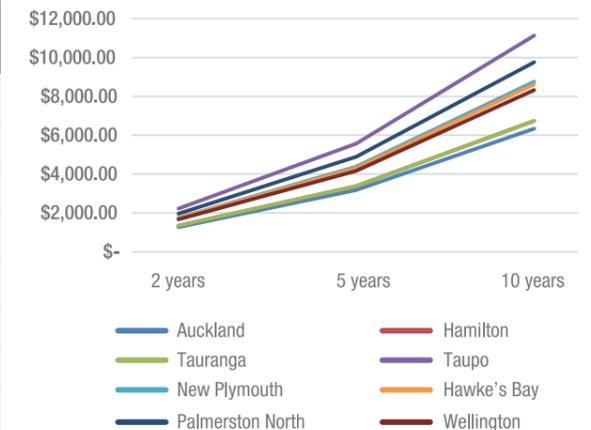

South Island	2 Years	5 Years	10 Years
Nelson	\$ 1,808.05	\$ 4,520.13	\$ 9,040.25
Christchurch	\$ 2,354.70	\$ 5,886.75	\$ 11,773.51
Greymouth	\$ 2,338.37	\$ 5,845.92	\$ 11,691.84
Queenstown	\$ 2,970.20	\$ 7,425.50	\$ 14,851.01
Dunedin	\$ 2,725.52	\$ 6,813.79	\$ 13,627.59
Invercargill	\$ 2,801.87	\$ 7,004.67	\$ 14,009.34

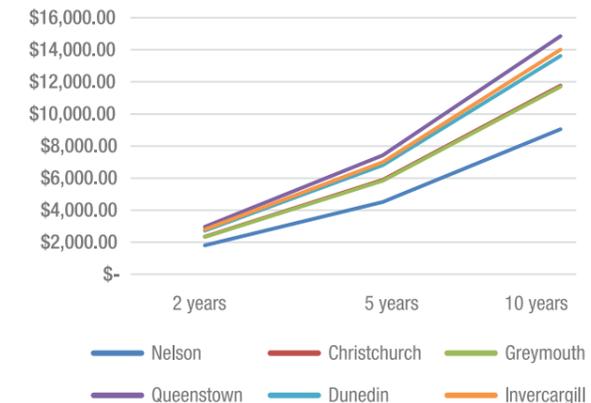

Mechanical ventilation with heat recovery units (MVHR) offer additional energy savings above and beyond that of a typical ventilation system. **Assumptions:** The savings shown here are purely based on potential heating cost savings when reheating air through a 90% efficient MVHR running continuously verses a direct air system to achieve 20°C+ year-round for an air volume based 0.35ACH in a 150m<sup>2</sup> house with a 2.4m ceiling height using electric heat at 30 cents/kWh.

# Positive Pressure Systems

# Heat & Energy Recovery Systems

## SmartVent lite+



**Investment Protection**  
Cost effective solution including an integral humidity guard against moisture, mould & mildew

## SmartVent positive3



**Control Condensation**  
Integral humidity guard against moisture, mould & mildew with multiple comfort add-on options

## SmartVent positive advance



**Control Your Climate**  
Comprehensive humidity control protection against moisture, mould & mildew with multiple comfort add-on options

## SmartVent tempra



**Ventilate Your Room**  
Single room heat recovery

## SmartVent fresh



**Flexible Ventilation for every space**  
Decentralised Heat Recovery Ventilation System

## SmartVent synergy3



**Control Indoor Climate**  
Reduce moisture, mould & mildew with multiple comfort add-on options

## SmartVent balance



**Combat Condensation**  
Reduce moisture, mould & mildew while maximizing energy efficiency

## Econiq From Vent-Axia



**All-in-one Solution**  
Reliable, highly efficient, quiet and easy to operate ducted ventilation system

Systems	Lite+	Positive3	Positive Advance	Tempra	Fresh	Synergy3	Balance	Econiq
Core Typr				Counterflow Heat Recovery	Ceramic Heat Recovery	Crossflow Energy Recovery	Counterflow Heat Recovery	Counterflow Heat Recovery
Supply Rooms (Fresh air in)	1 - 12	1 - 12	2 - 12	Modular	Modular	3 - 6	3 - 6	3 - 8
Extract Rooms (Stale air out)				Simultaneous	Push-Pull	1 - 2	1 - 3	1 - 4
Moisture Control	Basic	Enhanced	Enhanced	Basic	Enhanced	Enhanced	Enhanced	Enhanced
Quicker pay back (Heat/energy recovery)				√ (Up to 80%)	√ (Up to 82%)	√ (Up to 75%)	√ (Up to 90%)	√ (Up to 93%)
Cheaper to Run (EC Fan)		√	√		√		√	√
Heat retention (Insulated ducting)		√	√		√	√	√	√
Quieter (Acoustic insulated ducting)		√	√		√	√	√	√
<b>Comfort Add-ons</b>		Optional	Optional		Built-in	Optional	Built-in	Built-in
Free-cooling (Flexi Air Source)		Optional	Optional		Extract Mode	Optional (Flexi Air Source)	√	√
Heat Transfer		Optional	Optional			Optional		
Air Tempering		Optional (Tempering Heater)	Optional (Tempering Heater)	√	√	√	√	√
Core Bypass							√	√
<b>Controls &amp; Sensors</b>	3.5" Monochrome Touchscreen	3.5" Monochrome Touchscreen	6.8" Colour Touchscreen	3-speed	Optional	6.8" Colour Touchscreen	Wall Controller	Wall Controller
App Control (SmartLife)		√	√		√	√	Not Required	√
Ease of Use	Basic	Basic	Enhanced	Basic	Advanced	Enhanced	Intermediate	Advanced
Humidity & Temperature Sensing	√ x2	√ x3	√ x4		√ (+Expandable)	√ x4	√ (Built-in)	√ (+Expandable)
Rental Lock	√	√					√	√
Scheduling	Daily	Daily	Weekly		Daily	Weekly	Daily	Weekly

# Comfort Add-Ons

SmartVent Positive Pressure and Heat & Energy Recovery Systems can be further enhanced with the addition of any of the following Comfort add-ons.



## Flexi Air Source

During warmer months, outside air can be used as the primary air source for the system instead of roof cavity air. Keeping bug and pollen out overnight while bringing in a fresh filtered breeze when you need it most.

Typically installed under the eaves on the southern side of a home which ensures the coolest air possible is used. If the house design prevents a Flexi Air Source from being installed, alternative options such as through roof kits are available.

During cooler months, the Flexi Air Source can be used in the opposite way. This kit allows air to be drawn from the warmer roof cavity instead of outside, allowing you to automatically take advantage of any solar gain.



## Heat Transfer

During cooler months, excess heat from your heated lounge can be transferred to your bedrooms. The recycle function is a bonus feature which allows inside air to be recirculated when outside temperatures are still too cold. It is important to remember that while heat transfer is active the system is not bringing fresh air in.

Heat Transfer is recommended when your home has a heat source that generates excess heat, such as a wood fire. It is important to note that a heat pump may not be suitable for heat transfer as they are typically sized for the room they occupy.



## Tempering Heater

When it's cold outside and you want to take the chill off the incoming air, a 1kW or 2kW tempering heater allows you to make the most of the driest air available. Note that the tempering heater is not a home heating solution and is not a substitute for an effective heating system. The Tempering Heater will make the incoming air more comfortable, but not make your home dramatically warmer.

Systems with multiple fans need one heater per fan. For homes over 280m<sup>2</sup>, systems require two fans, and some smaller homes may need two depending on layout. You may choose to only have one heater, but if your system has two fans some rooms will miss out on the benefits.

\* Heat Transfer and Tempering Heater operations can be scheduled to maximise convenience.



*Like a cold drink on a hot day, moisture will form when the temperature of the air drops while in contact with colder surfaces. This condensation is what happens when air reaches dew point.*



# SmartVent lite+



## Overview

SmartVent Lite+ is a centralised positive pressure system that uses temperature and humidity sensing to ensure that you are protecting your home or rental property from moisture buildup. Two wireless temperature and humidity sensors measure moisture and temperature inside your home and outside to calculate the dew point.

As a temperature and humidity-based solution, the SmartVent Lite+ uses humidity control to increase or decrease airflow to control the moisture within a home or rental property. The rental lock feature enables a property owner to lock the controller to prevent tenants from switching the system OFF while still allowing system temperatures, fan speeds and ventilation scheduler adjustments to suit the lifestyles/needs of the occupants. The Lite+ also features low temperature protection, a short run of acoustically insulated ducting, and a user-friendly control system.

## Investment Protection

Cost effective solution including an integral humidity guard against moisture, mould and mildew

What is the size of your home (m <sup>2</sup> )?	Number of Rooms	Fans	Model
Up to 100m <sup>2</sup>	1	1	SV01L+
	2		SV02L+
	3		SV02L+ with 1 Extension Kit
Up to 280m <sup>2</sup>	4	1	SV04L+
	5		SV04L+ with 1 Extension Kit
	6		SV04L+ with 2 Extension Kits
Up to 560m <sup>2</sup>	6	2	SV06L+
	7		SV06L+ with 1 Extension Kit
	8		SV06L+ with 2 Extension Kits
	9		SV06L+ with 3 Extension Kits
	10		SV06L+ with 4 Extension Kits
	11		SV06L+ with 5 Extension Kits
12	SV06L+ with 6 Extension Kits		

## Add-Ons

Lite+ is not compatible with our range of comfort add-ons. For added comfort and flexibility check out our other options

Features	
Humidity Sensing	💧 x2
Temperature Sensing	🌡️ x2
Low Temperature Protection	🔄
Auto or Manual Operation	📶 AUTO MAN
Rental Property Lock	🔒
Boost Control	🌀
Filter Change Alert	📶
Screen Brightness Control	🌞
Scheduler	🕒 DAILY

*“ Almost a third of all rental homes have been found to feel damp. ”*



# SmartVent positive3



## Condensation Control

Integral humidity guard against moisture, mould and mildew with multiple comfort add-on options

### Overview

SmartVent Positive3 is a centralised positive pressure system that monitors temperature and humidity conditions in your home, roof cavity, and at the outside source, to ensure that your home is kept dry, and your air is fresh. Two wireless temperature and humidity sensors mean sensors can be placed in the optimum locations and not limited by cabling.

As a temperature and humidity-based solution, the SmartVent Positive3 uses dew point control to increase or decrease airflow to control the moisture within a home. The SmartVent Positive3 has several key features, such as its energy efficient brushless EC fans, acoustic and thermally insulated ducting, low temperature protection, and a user-friendly control system and App control (SmartLife). The flexible upgrade options allow users to customise the system to suit their individual needs.

### SmartVent Positive3 Range

Enhanced home ventilation system suitable for most types of homes.

What is the size of your home (m <sup>2</sup> )?	Number of Rooms	Fans	Model
Up to 100m <sup>2</sup>	1	1	SV01P3
	2		SV02P3
	3		SV02P3 with 1 Extension Kit
Up to 280m <sup>2</sup>	4	1	SV04P3
	5		SV04P3 with 1 Extension Kit
	6		SV04P3 with 2 Extension Kits
Up to 560m <sup>2</sup>	6	2	SV06P3
	7		SV06P3 with 1 Extension Kit
	8		SV06P3 with 2 Extension Kits
	9		SV06P3 with 3 Extension Kits
	10		SV06P3 with 4 Extension Kits
	11		SV06P3 with 5 Extension Kits
12	SV06P3 with 6 Extension Kits		

### Add-Ons

Flexi Air Source	Heat Transfer	Tempering Heater Small (1kW)*	Tempering Heater Large (2kW)*	Through Wall Grille

\*Larger systems for homes above 280m<sup>2</sup> with two fans will require two tempering heaters (one for each fan)



# SmartVent positive advance



## Control Your Climate

Comprehensive humidity control protection against moisture, mould and mildew with multiple comfort add-on options

### Overview

SmartVent Positive Advance is a centralised positive pressure system that uses advanced automation for enhanced moisture control. Four wireless temperature and humidity sensors measure moisture and temperature throughout the home, in the roof cavity and outside to calculate the dew point.

This comprehensive solution can then determine how much fresh air to introduce to prevent the temperature from reaching dew-point and causing condensation on windows. The market-leading Positive Advance comes with a range of features such as flexible upgrade options, weekly scheduling, dew point control, energy efficient brushless EC fans, and acoustic and thermally insulated ducting, as well as an intuitive wall controller and App control (SmartLife). Just set the preferred temperature and the system does the rest.

### SmartVent Positive Advance Range

Comprehensive home ventilation system suitable for most types of homes.

What is the size of your home (m <sup>2</sup> )?	Number of Rooms	Fans	Model
Up to 100m <sup>2</sup>	2	1	SV02AD
	3		SV02AD with 1 Extension Kit
Up to 280m <sup>2</sup>	4	1	SV04AD
	5		SV04AD with 1 Extension Kit
	6		SV04AD with 2 Extension Kits
Up to 560m <sup>2</sup>	6	2	SV06AD
	7		SV06AD with 1 Extension Kit
	8		SV06AD with 2 Extension Kits
	9		SV06AD with 3 Extension Kits
	10		SV06AD with 4 Extension Kits
	11		SV06AD with 5 Extension Kits
12	SV06AD with 6 Extension Kits		

### Add-Ons

Flexi Air Source	Heat Transfer	Tempering Heater Small (1kW)*	Tempering Heater Large (2kW)*	Through Wall Grille

\*Larger systems for homes above 280m<sup>2</sup> with two fans will require two tempering heaters (one for each fan)



Features	
App Control	
WiFi Connect	
Dew Point Control	
Humidity Sensing	
Temperature Sensing	
Low Temperature Protection	
Auto or Manual Operation	
Boost Control	
Filter Change Alert	
Screen Brightness Control	
Scheduler	

# SmartVent synergy3



### Overview

SmartVent Synergy3 is a centralised energy recovery system that uses advanced automation for enhanced moisture control and improved heat retention. Four wireless temperature and humidity sensors measure moisture content throughout the home, in the roof cavity and outside to calculate dew point. While ideal for any home more air-tight construction enhances the energy recovery benefits.

This comprehensive solution can then determine how much fresh air to introduce to prevent the temperature from reaching dew point and causing condensation on windows. The SmartVent Synergy3's heat recovery core has an efficiency of up to **75%**, so you can ventilate your home in winter without having to spend a fortune re-heating it. Synergy3 also features flexible upgrade options, weekly scheduling, dew point control, and acoustic and thermally insulated ducting, as well as an intuitive wall controller and App control (SmartLife).

### SmartVent Synergy3 Range

Home ventilation system best suited to homes built to modern standards.

What is the size of your home (m <sup>2</sup> )?	Description	Model
Up to 150m <sup>2</sup>	3 supply outlets/1 extract (expandable to 4 outlets /2 extracts*)	SYN1015AD
Up to 250m <sup>2</sup>	3 supply outlets/1 extract (expandable to 5 outlets /2 extracts*)	SYN2025AD
Up to 350m <sup>2</sup>	3 supply outlets/1 extract (expandable to 6 outlets /2 extracts*)	SYN3035AD


#Contact SmartVent for design advice if more outlets or extracts are required

### Add-Ons

Flexi Air Source	Heat Transfer	Tempering Heater Small (1kW)*
Tempering Heater Large (2kW)*	Through Wall Grille	

## Control Indoor Climate

Reduce moisture, mould and mildew with multiple comfort add-on options

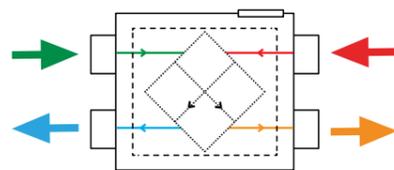

- Return Air** - Moist, humid air is extracted from the home
- Outside Air** - Fresh air drawn in from outside
- Exhaust Air** - Moist, stale air forced out of the home
- Supply Air** - Tempered air enters the home

Features	
App Control	
WiFi Connect	
Dew Point Control	
Humidity Sensing	
Temperature Sensing	
Low Temperature Protection	
Auto or Manual Operation	
Core Efficiency (°C)	Up to 75%
Boost Control	
Filter Change Alert	
Screen Brightness Control	
Scheduler	



# SmartVent balance



### Overview

SmartVent Balance is an energy efficient centralised heat recovery ventilation system that uses advanced automation and an effective heat recovery core to ventilate a home with minimal heat losses. The unit is a complete home solution with built-in sensors which record humidity and temperature as air flows through the unit. While ideal for any home, more air-tight construction enhances the energy recovery benefits.

Using an integral counterflow heat exchanger, up to **90%** of heat energy can be recovered from your home, maximising energy efficiency. Running costs are further minimised with energy efficient brushless EC motors. The Balance's polymer heat recovery core enables heat transfer and extraction from wet zones like bathrooms, which is useful in continuous applications. A built-in core bypass allows for effortless summer operation. Acoustic and thermal ducting is also available, for quiet and efficient running. The SmartVent Balance is designed for completely autonomous operation, with a digital controller for manual override as required.

### SmartVent Balance Range

Home ventilation system best suited to homes built to modern standards.

What is the size of your home (m <sup>2</sup> )?	Description	Model
Up to 150m <sup>2</sup>	3 supply outlets/1 extract (expandable to 4 outlets /2 extracts*)	BAL225
Up to 250m <sup>2</sup>	5 supply outlets/2 extract (expandable to 6 outlets /3 extracts*)	BAL405

#Contact SmartVent for design advice if more outlets or extracts are required


### Add-Ons

Due to its advanced systems, built-in core bypass and highly efficient heat recovery core, Balance does not require any add-ons.



## Combat Condensation

Reduce moisture, mould and mildew while maximizing energy efficiency

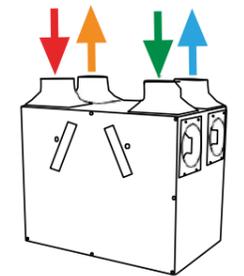

- Return Air** - Moist, humid air is extracted from the home
- Outside Air** - Fresh air drawn in from outside
- Exhaust Air** - Moist, stale air forced out of the home
- Supply Air** - Tempered air enters the home

Features	
Humidity Sensing	
Temperature Sensing	
Auto or Manual Operation	
Core Efficiency (°C)	Up to 90%
Core Bypass	
Boost Control	
Filter Change Alert	
Scheduler	

# SmartVent tempra

### Overview

SmartVent Tempra is a single room through wall heat recovery unit suitable for residential retrofit and new builds, elderly care facilities, student accommodation, military barracks, apartments and locations with no roof cavity access.

SmartVent Tempra meets the performance requirements for continuous ventilation under the NZ Building Regulations. With a 100mm diameter heat recovery outlet, these easy-to-use units have low energy consumption and low noise levels.

Based on a 2.4m stud and 0.35 ACH (as per NZS4303.1990), SmartVent Tempra can be set to run continuously at 6 l/s (for rooms up to 25m<sup>2</sup>) or 9 l/s (for rooms up to 37m<sup>2</sup>), boosting up to 13 l/s, recovering heat energy from the extracted air and returning it to the dwelling.

The unique, compact heat exchanger has a core efficiency of up to **80%**, saving energy and reducing your carbon footprint while providing quality ventilation in situations where a traditional heat recovery ventilation system is not practical.

### SmartVent Tempra Range

Length	Rooms	Description
450mm	1	Standard Tube
590mm	1	Long Tube

### Performance

Specification	Trickle – Low	Trickle – High	Boost
Free Air Performance	6 l/s	9 l/s	15 l/s
Power	3.2W	5.7W	26.6W
Sound*	27.3 dB(A)	35.9 dB(A)	48.8 dB(A)

\* Octave band frequency range of 250Hz to 4KHz at 3m.  
Unit mounted on a reflective surface.





## Ventilate Your Room

Single room heat recovery

- Constant trickle ventilation (24 hours, 7 days) with airflow boost option
- Separated airflows so that extracted moisture is not re-introduced
- Consistently higher heat recovery than units that use “extract-supply cycling” methods
- Low energy consumption
- Low noise
- Security - reduces risk of theft as windows are not required to be left open.
- Can be switched to ‘extract only’ if desired

### Heat Exchanger

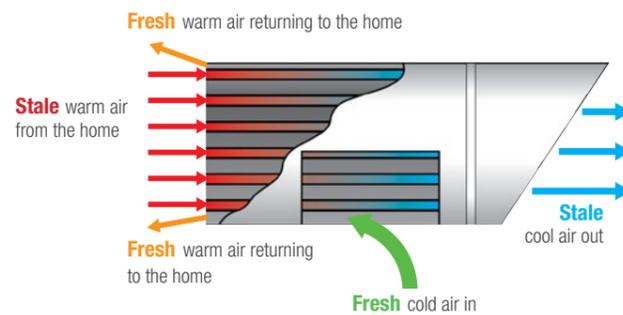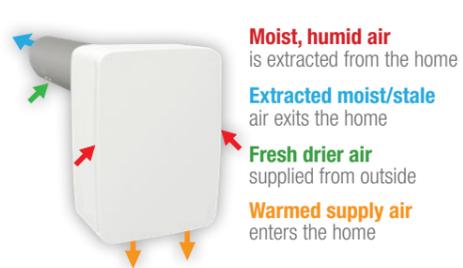

# SmartVent fresh

### Overview

The Fresh is a wall-mounted ventilation system designed to both supply and remove air from a space, while maintaining a comfortable temperature indoors through heat recovery. It's installed through the exterior wall of your home so it's perfect for downstairs spaces, homes with no roof access or roof space, apartments, basements and more.

As a decentralised heat recovery (dMVHR) the SmartVent Fresh works by absorbing energy in its ceramic core before reversing and returning that energy to the incoming air. It can scale to provide ventilation from individual rooms to entire properties. The units work stand-alone or communicate wired or wirelessly with up to 16 devices/sensors across 4 Ventilation Zones. Plus the system supports simple manual modes and advanced configuration via Bluetooth.

### SmartVent Fresh Range

Wall Depth	Rooms	Description
≥140	1-4	SmartVent Fresh - dMVHR Decentralised Mechanical Heat Recovery with App control

### Optional Automation

Automate your system via add-ons like humidity, temperature, and CO<sub>2</sub> sensors, or easily operate manually.



### Performance

Specification	Trickle (25%)	Medium (40%)	High (70%)	Boost (100%)
Efficiency	82%	72%	68%	60%
Extract/Heat Recovery (Pair)*	5.5 l/s (20m <sup>3</sup> /hr)	7.2 l/s (26m <sup>3</sup> /hr)	11.1 l/s (40m <sup>3</sup> /hr)	16.1 l/s (58m <sup>3</sup> /hr)
Power (Pair+Controller)	2.6W	3.5W	5.3W	10.1W
Heat Recovery (Single)*	2.8 l/s (10m <sup>3</sup> /hr)	3.6 l/s (10m <sup>3</sup> /hr)	5.5 l/s (20m <sup>3</sup> /hr)	8 l/s (28m <sup>3</sup> /hr)
Power (Single)	1.3W	1.75W	2.65W	5.05W
Sound	12dB(A)	24dB(A)	30dB(A)	37dB(A)



## FLEXIBLE VENTILATION for every space

Features	
App Control	
WiFi Connect	
Humidity Sensing	
Temperature Sensing	
Auto or Manual Operation	
Core Efficiency (°C)	Up to 82%
Trickle Ventilation	
Boost Control	
Filter Change Alert	
Scheduler	



# PureAir Room 260X



## PURIFY YOUR INDOOR AIR FOR A HEALTHIER HOME ENVIRONMENT

### Overview

The Vent-Axia PureAir Room provides a safe space for people suffering from allergies or who want to be sure they are not breathing in harmful pollutants and wish to improve their indoor air quality. The filters of an air purifier will remove airborne contamination and allergens such as dust, pollen, animal dander, dust mites, tobacco smoke, traffic fumes and more. Removing these can make a positive impact to the indoor air you breathe and therefore help to improve your health and wellbeing.



**Mould**

*Mycotoxins released by mould spores can cause headaches, eczema & lung conditions such as asthma*



**Dust**

*Household dust can be an irritant to our skin and lungs. It is also perfect food for dust mites which produce allergens*



**Viruses**

*Bacteria and viruses spread easily around the home in the air causing cold and flu like symptoms*



**Odour**

*Odour can be unpleasant but odour caused by pollutants like aerosols and air fresheners can be detrimental to your health*

### PureAir Room 260X Range


Description
PureAir Room 260X Air Purifier with App Control (Smart Life)
PureAir Room 260X Replacement Filter

### Technical

Supply	220–240V AC, 50Hz	Rated Power	60W
Air Flow Rate	260m³/h	Room size	30m²
Timer	1-8 hours	Noise Range	27-45 dB(A)
Dimensions (W*D*H)	350 x 210 x 550mm	Weight	5.8 kg



### Advanced 6 Stage Filtration System

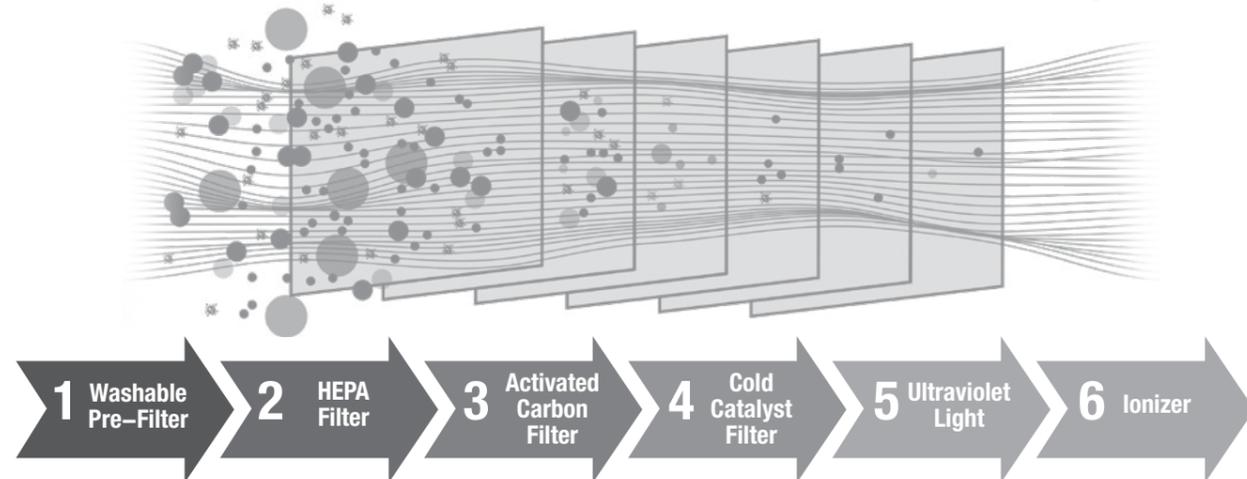

**Ideal Room Types**

Living Room

Dining Room

Bedroom

Nursery

Office

**2**  
yr  
WARRANTY



Heat & Energy Recovery Systems | Econiq

# Econiq

From Vent-Axia



### Overview

The Vent-Axia Econiq is a reliable, highly efficient, quiet and easy to operate ducted ventilation system and part of our mechanical ventilation systems with heat recovery (MVHR) range. Using cutting-edge technology, it moves air throughout your home providing both active removal and fresh air supply. When the two air streams pass through a central point energy is transferred from one stream to the other effectively tempering the incoming air with the outgoing warmth.

At **93%** core efficiency Econiq is our most energy efficient home ventilation system. This advanced system can take advantage of any heating or cooling energy inside your home to bring fresh air in at a more comfortable temperature. Because Econiq is a ducted solution with a polymer core you can use it to deliver a complete home solution providing both continuous extract for service areas (kitchens and bathrooms) and a continuous supply of fresh clean air to living spaces and bedrooms. Plus, the built-in temperature and humidity sensors allow the system to automatically adjust to suit your needs, while the App allows you to conveniently control your system at home.

### Econiq Range

Duct	Description
125mm	Econiq S - MVHR Mechanical Heat Recovery with App control
200mm	Econiq M - MVHR Mechanical Heat Recovery with App control

### Add-Ons

Due to its advanced systems, built-in core bypass and highly efficient heat recovery core, Econiq does not require any add-ons.



**Return Air** - Moist, humid air is extracted from the home  
**Outside Air** - Fresh air drawn in from outside  
**Exhaust Air** - Moist, stale air forced out of the home  
**Supply Air** - Tempered air enters the home


**5**  
YEAR  
WARRANTY

## All-in-all Solution

Reliable, highly efficient, quiet and easy to operate ducted ventilation system


Features	
App Control	
WiFi Connect	
Humidity Sensing	
Temperature Sensing	
Auto or Manual Operation	
Core Efficiency (°C)	<b>Up to 93%</b>
Core Bypass	
Lock	
Boost Control	
Filter Change Alert	
Scheduler	

Specifications	SV01L+	SV01P3	SV02L+	SV02P3	SV02AD	SV04L+	SV04P3	SV04AD	SV06L+	SV06P3	SV06AD
House Size	Up to 100m <sup>2</sup>		Up to 100m <sup>2</sup>		Up to 280m <sup>2</sup>		Up to 280m <sup>2</sup>		Up to 560m <sup>2</sup>		Up to 560m <sup>2</sup>
Max. Fans	2	4	2	4	2	4	2	4	2	4	4
Fan Type	AC	EC	AC	EC	AC	EC	AC	EC	AC	EC	EC
Spigot Size	150mm		150mm		200mm		200mm		200mm		200mm
Fan Speeds	3	Infinitely Variable	3	Infinitely Variable	3	Infinitely Variable	3	Infinitely Variable	3	Infinitely Variable	Infinitely Variable
Max. Air Flow per Fan @ 0 Pa	152 l/s, 548m <sup>3</sup> /hr	175 l/s, 630m <sup>3</sup> /hr	152 l/s, 548m <sup>3</sup> /hr	175 l/s, 630m <sup>3</sup> /hr	282 l/s, 1014m <sup>3</sup> /hr	284 l/s, 1023m <sup>3</sup> /hr	282 l/s, 1014m <sup>3</sup> /hr	284 l/s, 1023m <sup>3</sup> /hr	282 l/s, 1014m <sup>3</sup> /hr	284 l/s, 1023m <sup>3</sup> /hr	284 l/s, 1023m <sup>3</sup> /hr
Max. Air Flow per Fan @ 150 Pa	98 l/s, 353m <sup>3</sup> /hr	132 l/s, 480m <sup>3</sup> /hr	98 l/s, 353m <sup>3</sup> /hr	132 l/s, 475m <sup>3</sup> /hr	211 l/s, 760m <sup>3</sup> /hr	206 l/s, 742m <sup>3</sup> /hr	211 l/s, 760m <sup>3</sup> /hr	206 l/s, 742m <sup>3</sup> /hr	211 l/s, 760m <sup>3</sup> /hr	206 l/s, 742m <sup>3</sup> /hr	206 l/s, 742m <sup>3</sup> /hr
Max. Static Pressure per Fan	336 Pa	568 Pa	336 Pa	568 Pa	441 Pa	461 Pa	441 Pa	461 Pa	441 Pa	461 Pa	461 Pa
Power Supply	220–240V AC 50 Hz		220–240V AC 50 Hz		220–240V AC 50 Hz		220–240V AC 50 Hz		220–240V AC 50 Hz		220–240V AC 50 Hz
Input Power per Fan	57W	67W	57W	67W	105W	85W	105W	85W	105W	85W	85W
Current (A) per Fan	0.26A	0.29A	0.26A	0.29A	0.47A	0.7A	0.47A	0.7A	0.47A	0.7A	0.7A
Operating Temp	–25°C to 50°C		–25°C to 50°C		–25°C to 50°C		–25°C to 50°C		–25°C to 50°C		–25°C to 50°C
Sound Level	47 dB(A)		47 dB(A)		53 dB(A)		53 dB(A)		53 dB(A)		53 dB(A)

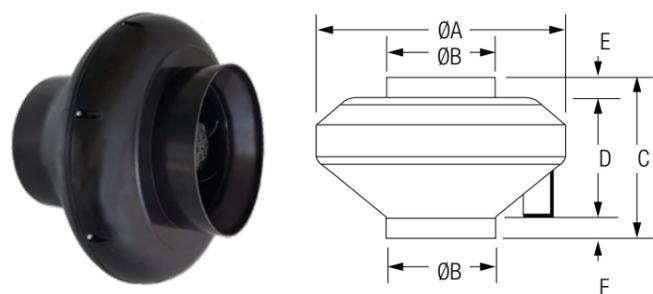


Fan Dimensions (mm)	A	B	C	D	E	F
Spigot Size – 150mm	340	150	280	170	50	60
Spigot Size – 200mm	340	200	280	170	50	60

Specifications	SYN1015AD	SYN2025AD	SYN3035AD	BAL225	BAL405	Econiq S	Econiq M
Fan Type	AC Centrifugal			EC Centrifugal		EC Centrifugal	
Max. Fan Cores	2			–		–	
Spigot Size	150mm			125mm	150mm	125mm	200mm
Fan Speeds	3			10		4 (Programmable)	
Max. Air Flow per Fan @ 0 Pa	77 l/s, 277 m <sup>3</sup> /hr	97 l/s, 350 m <sup>3</sup> /hr	130 l/s, 468 m <sup>3</sup> /hr	76 l/s, 275 m <sup>3</sup> /hr	136 l/s, 490 m <sup>3</sup> /hr	177 l/s, 421 m <sup>3</sup> /hr	166 l/s, 600 m <sup>3</sup> /hr
Max. Air Flow per Fan @ 150 Pa	38 l/s, 137 m <sup>3</sup> /hr	60 l/s, 216 m <sup>3</sup> /hr	90 l/s, 324 m <sup>3</sup> /hr	62 l/s, 223m <sup>3</sup> /hr	110 l/s, 395 m <sup>3</sup> /hr	97 l/s, 349 m <sup>3</sup> /hr	125 l/s, 450 m <sup>3</sup> /hr
Max. Static Pressure per Fan	238 Pa	285 Pa	354 Pa	380 Pa	600 Pa	700 Pa	680 Pa
Power Supply	230–240V AC 50 Hz			220–240V AC 50 Hz		220–240V AC 50 Hz	
Total Input Power	120W	178W	280W	128W	173W	166W	206W
Current (A)	0.46A	0.7A	1.1A	0.58A	0.79A	0.76A	0.94A
Operating Temp	–10°C to 40°C			–20°C to 45°C		–20°C to 40°C	
Sound Level	31.5 dB(A)	34 dB(A)	37 dB(A)	39 dB(A)		43 dB(A)	38 dB(A)

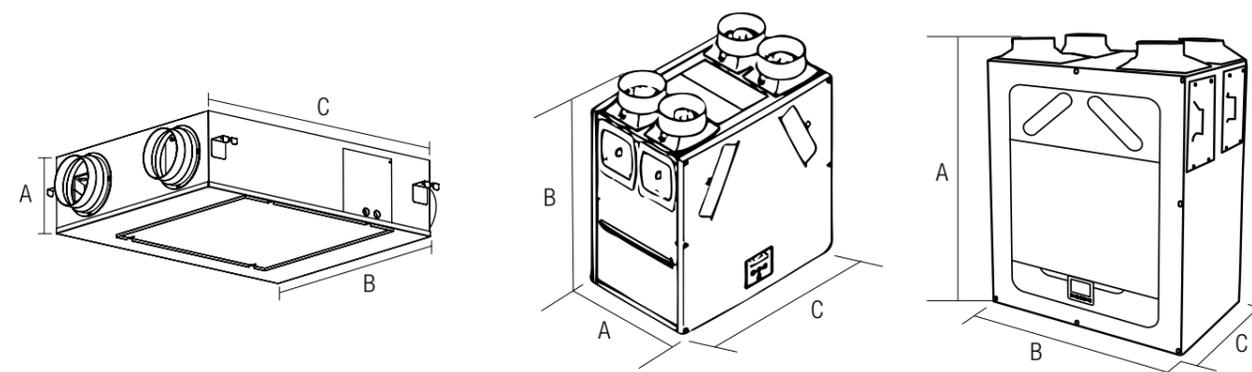

Energy Recovery Core Dimensions (mm)	A	B	C	Heat Recovery Core Dimensions (mm)	A	B	C	Heat Recovery Core Dimensions (mm)	A	B	C
SYN1015AD	230	690	860	BAL225	285	650	550	Econiq S	823	660	443
SYN2025AD	230	710	930	BAL405	524	745	776	Econiq M	931	728	608
SYN3035AD	240	820	1070								

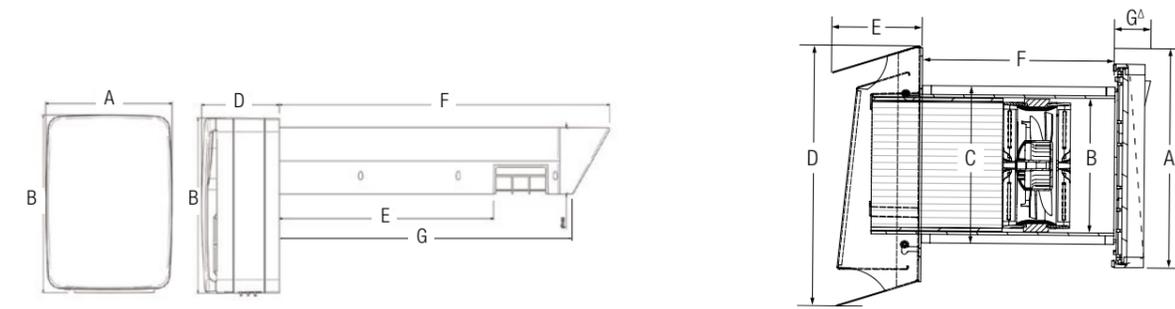

Tempra Dimensions (mm)	A	B	C	D	E	F	G
Standard Tube	190	266	262	117	321	496	450
Long Tube	190	266	262	117	461	636	590

Fresh Dimensions (mm)	A	B	C	D	E	F	G
Standard	270	Ø160	Ø180	276	80	≥140	44



# SmartVent

the expert's choice

## HOME VENTILATION SYSTEMS

***Ask how we can do it for you***

General enquiries ph: 0800 140 150

[www.smartvent.co.nz](http://www.smartvent.co.nz) | [enquiry@smartvent.co.nz](mailto:enquiry@smartvent.co.nz)



The team at SmartVent is committed to our sustainability goals including reusing all packaging bearing this mark  please ask your installer for more information on this exciting initiative.

Specifications are subject to change without notice

By Simx | PUB0181 2412